

Brief Views





WR133F Router is an AC1200 wireless dual band router specially designed for apartment. This kind of home router equipped with 64MB memory, which has larger data cache space, enables the system to run fast and stably.

It adopts the MTK mainstream chip solution. The built-in independent PA / LNA signal enhancement module and external 4 high-gain omnidirectional antennas produce strong signal penetration performance. This AC1200 wireless dual band router is widely used in various applications such as wireless relay, LED light / WIFI timer switch.

WR133F provides a maximum wireless access rate of 1200Mbps, 1 Ethernet WAN port, and 2 Ethernet LAN ports.

Main Features









TR069



















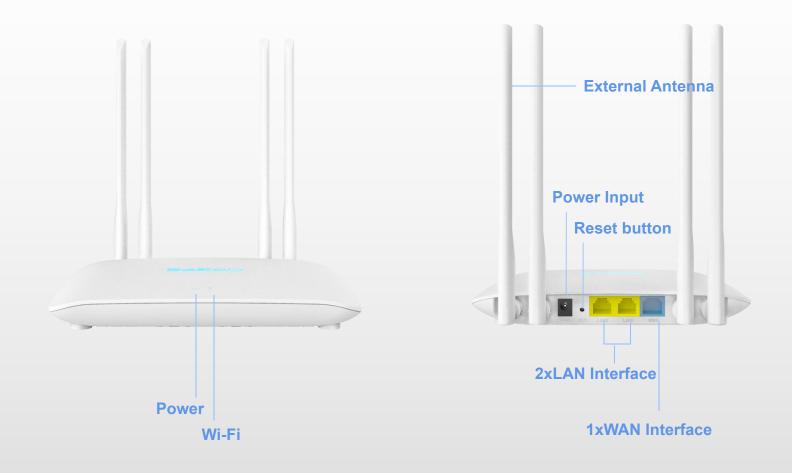

Application scenario



2.4G and 5G wifi switch automatically

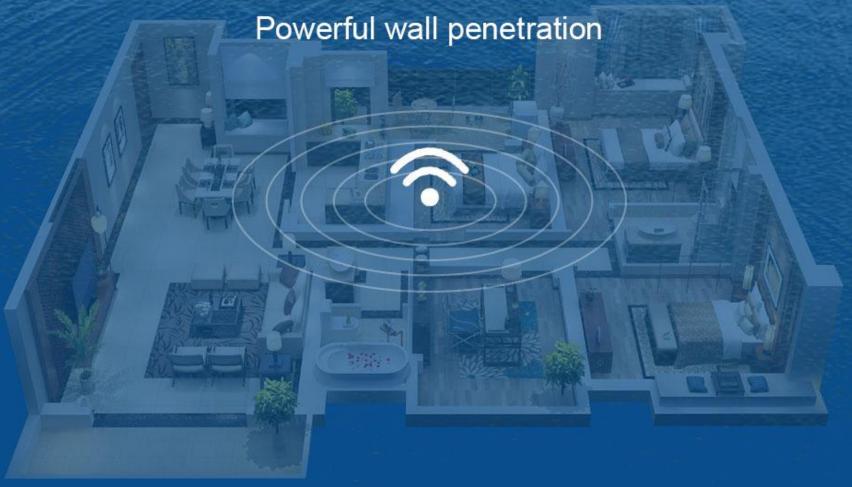

Hardware Features



Name	AC1200 Wireless Router		WAN	1 RJ45 port ,10/100Mbps
Model	el WR133F		LAN	2 RJ45 port ,10/100Mbps
CPU	MTK CPU MT7628DAN		Reset	Button
Memory /Storage	64MB/8MB			
Wi-Fi Antennas	2×2.4GHz 2×5GHz External 5dBi Gain	Transmit Power	2.4G 2.4G enhanced 5G	20dBm I 23dBm 20dBm
Protocol	IEEE 802.11a/b/g/n/ac			
Wi-Fi Speed	2.4G Wi-Fi (Speed 300Mbps) 5G Wi-Fi (Speed 867Mbps)	Power Supply	DC12V/1A Adapter	
	Green: Power on	Power Consumption	<6W	
LED	Power Off: Power off	Dimension	180x130x26mm	
LLD	Wi-Fi Green: Wi-Fi up Off: Wi-Fi down	Operating Temperature -10 ~ 50°C		
		Storage Temperature	-40 ~ 85°C	

Software Features



IP Proto	cols	IPv4/IPv6	Guest Wi-Fi	2.4G Guest SSID 5G Guest SSID
WAN Mo	ode	Dynamic IP Static IP PPPoE	Parental Control	s Limited Time DD/MM Monday to Sunday
Security	Firewall Access Control IP & MAC Binding MAC/IP/URL/Port Filter Application Layer Gateway DDoS Attack Prevention	Equipment Mode	Router Bridge Relay	
		Management	WEB Telnet TR069	
System Service	DDNS Telnet Server DMZ Host UPnP Remote WEB OTA Upgrade Diagnosis NTP	System log	System log	
		Multicast	IPTV IGMP	
		QoS	Speed limit	

Ordering Information



Product Model	Product Description	
WR133F-M12	1*10/100Base-Tx Ethernet WAN port, 2*10/100Base-Tx Ethernet LAN ports, external 4*5dBi antennas, built-in 2.4G PA, support 2.4G/5G dual frequency, support 802.11 a/b/g/n/ac protocol, wireless transmission rate 1200Mbps, 12VDC power supply.	
WR133F-M10	1*10/100Base-Tx Ethernet WAN port, 2*10/100Base-Tx Ethernet LAN ports, external 4*5dBi antennas, support 2.4G/5G dual frequency, support 802.11a/b/g/n/ac protocol, wireless transmission rate 1200Mbps, 12VDC power supply.	

Contact Us

Shenzhen Ceres Technology Co., Ltd. Address: Floor 6, Building F, Songbai Road 1008, Sunshine Community, Xili Street, Nanshan District, Shenzhen(518108) Tel: +86-755-26014509/4710/4711

Fax:+86-755-26014506

Email: marketing@cerestec.com

Website: www.szceres.com